

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

CERTIFIED COPY OF
PRIORITY DOCUMENT

Intyg
Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande BTG Eclépens SA, Eclépens CH
Applicant (s)

(21) Patentansökningsnummer 0302400-7
Patent application number

(86) Ingivningsdatum 2003-09-08
Date of filing

Stockholm, 2004-07-13

För Patent- och registreringsverket
For the Patent- and Registration Office


Juris Rozītis

Avgift
Fee 170.-

BEST AVAILABLE COPY

AWAPATENT AB

Kontor/Handläggare

Stockholm/Mattias Pierrou/EAG

BTG Eclepens S.A.

Ansökningsnr

Vår referens

SE-21005151

1

Ink. t. Patent- och reg.verket

2003 -09- 0 8

CREPING BLADE

Huvudfaxen Kassa

Technical field of the invention

The present invention relates to blades for creping. More particularly, the present invention relates to creping blades provided with a ceramic coating.

5

Technical background

Creping doctor blades are commonly used in the production of tissue. The blades have the function of detaching a paper web from a rigid, hot dryer cylinder (often called a Yankee dryer) and at the same time exert a compressive action on the web thereby creating the typical crepe structure of a tissue product.

Nowadays, the creping blade must fulfill many requirements:

- 15 - The blade must overcome the adhesive forces which stick the paper web on the dryer surface, the adhesion being promoted (for purposes of drying the web) by a chemical coating applied to the dryer by means of a spray-boom.
- 20 - The blade should create the desired crepe structure in the web and thereby provide the right bulk, softness and mechanical strength to the tissue. For this aspect, the geometry of the blade tip is
- 25 important. A square edge blade (90 degrees) in a given creping situation will create a different tissue than a blade with a sharp edge of say 75 degrees in the same creping situation. The former situation gives a higher bulk and coarser crepe structure than do the latter.
- 30 - The blade should keep the tissue parameters as constant as possible for the longest possible period of time. In other words, the wear of the blade tip

and its interaction with the layer of coating chemicals on the web are important factors.

- 5 - The blade should be as friendly as possible against the dryer surface. This means that any wear should predominantly or exclusively occur on the blade, rather than on the dryer surface. The surface of the dryer can be either cast iron (same material as the bulk of the cylinder, i.e. a cylinder without any surface deposit) or a metallisation obtained by, for example, thermal spraying. As an example, WO 97/22729 describes a method for coating Yankee dryers.
- 10

15 Creping blades are subjected to wear for different reasons. First there is sliding wear against the dryer, and second there is impact wear due to the web hitting the blade during creping. It has been found that the progressive wear of the creping blade is directly related to unwanted evolution of the tissue properties, such as changes in bulk and softness. Practical experience, after having reviewed many tissue mills, has shown that the best properties of the tissue are obtained only with a new blade. For steel blades, this period of good properties could be as short as one reel only.

20

25 In order to accommodate for such behavior (i.e. blade wear), tissue makers are specifying ranges of properties which are said to be acceptable. Nevertheless, there would be a high industrial demand for the tissue quality reached in the very first part of the first reel after a blade change. When the targeted range of tissue properties is not reachable anymore, the creping blade is changed for a new one, obtaining again the desirable characteristics but which are rapidly decreasing. Generally, steel blades of grade type such as AISI 1074 in quenched and tempered states are used. Such blades generally show rapid wear and consequently rapid changes in tissue quality, as well as possible micro-welding

30

35

2003 -09- 0 8

3

Huvudfaxen Kossan

issues with the dryer surface and a so-called hot waving behavior.

For the reasons mentioned above, there has been made several attempts to improve the behavior of such blades by adding hard, wear resistant materials at the blade tip.

US patent 3,688,336 explain the possibility to add a wear resistant material at the blade tip by a suitable method of the thermal spraying type. The desire to avoid chipping of the wear resistant material was recognized. The referenced US patent proposes the solution to use a groove at the blade tip and a break-in space between the wear resistant material in the groove and the leading edge of the blade.

GB 2,128,551 discloses a multipurpose scraper which may be used as a creping blade, having an edge coated by thermal spraying in many passes with a wear resistant material from the ceramic or metal carbide families. More specifically, alumina-titania is presented. Focus is further made on flexibility and again is the need for minimum brittleness emphasized.

Other documents, such as US-6,207,021 and US-6,074,526, teach the possibility to create a recess on the blade tip in order to obtain an essentially constant contact surface against the dryer, and by this feature a constant scraping efficiency. Apart from the fact that such solutions are very much increasing the manufacturing costs for the blade, by virtue of elaborate and accurate grinding, such solutions are in practice exposed to blade tip failure due to hot friction wear and possible plastic flow of the reduced portion of the blade remaining at disposal for sliding wear.

Today, thermally sprayed ceramic tipped blades are used in the tissue industry. Ceramic compositions including alumina, alumina-titania and alumina-zirconia are well known in the field. The 60%/40% alumina-zirconia fulfils the basic requirements of good sliding wear

2003 -09- 08

4

Huvudfaxen Kassen

against cast iron, very high fracture toughness and at the same time a relatively low hardness. Although creping blades having these features may bring benefits in terms of lifetime, they still suffer from a number of drawbacks:

5

10

15

20

25

30

35

1. Firstly, there is a large variation in blade lifetime due to chipping problems of the ceramic edge. The blade has to be removed and replaced after a lifetime which can be anywhere between 5 minutes to 12 hours. It has been observed in practice that most of the failures observed when using ceramic tipped blades occur during the very first period after a blade change. If relatively small, such chips are responsible for what is often called "tramlines" on the mother reel when winding. With increasing size of such chips in the blade, or decreasing grade of the tissue to lower grammages, the chips may cause web breaks and holes on the tissue. This impairs productivity and quality. In conjunction to this point, the clear trend to use more and more recycled fibers in tissue production leads to more and more high ash content and foreign particles being entrapped in the tissue-making process, thereby promoting even more chipping of the leading edge of the state of the art ceramic tipped creping blades.
2. Secondly, another limitation for such state of the art, thermally sprayed ceramic tipped blades is that for high quality tissue, such as facial towels, the conventional ceramic blade is not able to keep the very demanding tissue characteristics for any prolonged time. The inspection of worn ceramic blades shows that the impact of the tissue is much closer to the leading edge in such case compared to the situation for less quality demanding tissue. This can be understood by considering the fact that the high softness is obtained by having a very high

5 adhesion onto the dryer surface, the web detachment
and its impact thereby being close to the leading
edge of the creping blade. The consequence is that
once again chipping, in this case minute microchips,
develop at the tip of the ceramic blade, leading to
a "rounded" edge. Consequently, the tissue
properties decreases rapidly even when using a
ceramic tipped blade. For such situation, the
10 solution in line with US-3,688,336 referenced above
will be useless because the impact will occur in the
unprotected "breaking-in space".

 The use of creping blades tipped with thermally
sprayed metal carbides, such as for example WC-Co or WC-
15 Co-Cr is known. Such materials are less brittle than
sprayed ceramic and therefore less sensitive to edge
chipping. Nevertheless, the use of such materials should
be avoided due to other drawbacks, namely:

- 20 - There is a potentially higher wear rate of the
dryer surface, and potentially high damage due to
chattermarks if vibrations develop within the
tissue machine and are transferred to the creping
blade.
- 25 - Metal carbides are constituted by a metal matrix
with embedded carbides. Such situation may promote
the micro-welding events between the blade and the
dryer surface at the high temperatures present in
the sliding contact. This may lead to transfer of
30 material from the dryer to the blade, causing
premature wear or damage to the surface of the high
cost dryer cylinder or costly metallization.
- 35 - Another limitation of metal carbides derives from
their high thermal conductivity. The friction wear
is creating a large amount of heat, adding to the
temperature of the already hot dryer surface. Steel
creping blades or creping blades made of a steel
substrate with an edge coating of metal or metal

carbide may obtain a blue color at about 10 mm from the tip, which count for temperature exceeding 300°C. On long blades (wide machines), the steel expands sufficiently to create waving of the blade, instabilities in the blade holder, difficulties to unload blades and possibly damages to the Yankee drum, in particular when unloading such a hot blade. This is the so-called hot waving behavior.

Consequently, there is a need in the tissue industry for a creping blade with improved behavior, including the advantageous features of ceramic materials from a friction standpoint, but lacking the chipping drawbacks resulting from material brittleness.

Summary of the invention

One object of the present invention is therefore to provide a creping blade having a thermally sprayed ceramic tip, which blade does not present the macrochips limitations explained above, thereby avoiding the large fluctuations in blade lifetime.

A second object of the invention is to provide a blade that is more resistant to microchips when used on high quality tissue, such as facial tissue, allowing for the tissue properties to be maintained within the desired range for a longer period of time, i.e. an extension of the blade lifetime.

Another object of the invention is to provide a blade which is compatible with various types of Yankee dryer surfaces, e.g. both cast iron and metallisations, without premature wear of the dryer surface or material transfer from the dryer surface to the sliding contact of the blade due to microwelding.

Yet another object is to provide a very low sliding wear rate of the creping blade in order to maintain the scraping efficiency of the blade as constant as possible.

The surprising observation on which the present invention is founded is that the use of one sprayed ceramic compound which is more brittle than alumina-based products will enable the solution of the chipping problem in creping blade applications, and at the same time fulfill the other objects mentioned above. It has been found, to the surprise of the skilled person, that creping blades tipped with a ceramic of chromia (Cr_2O_3), or of chromia-titania ($\text{Cr}_2\text{O}_3/\text{TiO}_2$), applied by thermal spraying exhibit no chipping at the leading edge of the blade, neither small edge microchips nor any macrochips.

Typically, the ceramic material covers the blade substrate at least over the section thereof adapted for contact with the dryer cylinder (the working edge), as well as the section thereof upon which the web impacts during creping. Hence, the ceramic composition of the present invention improves both the sliding wear of the blade against the dryer cylinder, and the impact wear in the area of the blade where it is hit by the web.

Blades tipped with thermally sprayed chromia or chromia-titania with a titania-content of up to 25% by weight have been found to be suited for all creping requirements described above, as will be elucidated in the summary and various examples that follow.

It is preferred that the ceramic coating on the blade tip is chromia-titania ($\text{Cr}_2\text{O}_3/\text{TiO}_2$) with up to 25% by weight titania (TiO_2), more preferably 5% to 15% by weight titania (TiO_2), and most preferably with 10% to 15% titania.

The addition of titania to the ceramic composition also provides improved toughness, thereby facilitating coiling of the blades during, or subsequent to, manufacture. It has been found that delamination could occur between the ceramic deposit and the blade substrate when coiling the blade if the toughness of the ceramic deposit is too low. However, added toughness has lesser

value if the blades are produced in a flat process without coiling.

The chromia or chromia-titania ceramic deposit according to the present invention is a single phase coating without any lamella of titania in the coating microstructure. It is believed that this fact adds to the wear resistance of the coating. In a multiphase material, each phase generally behaves differently to wear, leading to roughening of the creping surface and an increased risk of web breakage. This becomes particularly important for low grammage tissue. The use of a single phase ceramic top layer according to the present invention provides uniform wear, leading to a smooth surface over the entire lifetime of the creping blade. This will be shown in more detail in the description below.

Brief description of the drawings

In the following, a detailed description of the invention will be given by way of preferred embodiments and practical examples. The description is given in conjunction with the accompanying drawings, on which:

Figure 1 illustrates the region of engagement between the surface of a dryer cylinder and the working edge of a newly installed creping blade according to the prior art (steel blade);

Figure 2 illustrates the region of engagement between the surface of the dryer and the working edge of a worn creping blade according to the prior art (steel blade) after a certain working time;

Figure 3 illustrates the region of engagement between the surface of the dryer and the working edge of a newly installed creping blade according to the present invention;

Figure 4 illustrates the region of engagement between the surface of the dryer and the working edge of a creping blade according to the present invention after

2003 -09- 0 8

Huvudfaxen Kassar

9

a similar working time as that of figure 2 for the prior art blade;

Figures 5 to 7 represent EDX spectra for blade sliding bevels and are referred to in Example 1 below;

5 Figure 8 is a SEM view of a macrochip event and is referred to in Example 1 below;

Figures 9 and 10 are SEM views of the working edges of creping blades and are referred to in Example 2 below;

10 Figure 11 is a graph representing softness obtained for three different types of blades and is referred to in Example 3 below;

Figures 12 and 13 are SEM views showing wear patterns after two different running times for a prior art blade; and

15 Figure 14 is a SEM view showing the wear pattern for a creping blade according to the present invention.

Detailed description of embodiments

20 An embodiment of the creping blade according to the present invention can comprise the following:

- a steel substrate having a thickness in the range from 0.635 to 1.250 mm; and a width in the range from 50 to 150 mm, preferably in the range from 75 to 120 mm;
- 25 - a prebevel on the steel substrate, with an angle in the range from 0 (no prebevel) to 10 degrees, preferably from 4 to 8 degrees;
- a bond coat, suitably applied by thermal spraying of Ni-Cr (80/20) for example by atmospheric plasma spraying (APS) to a thickness in the range from 10 to 50 microns;
- 30 - a ceramic top layer at the working edge of the blade, the ceramic being a composition of chromia or chromia-titania, suitably applied by for example APS, having a thickness at the front of the blade in
- 35 the range from 150 to 300 microns, preferably from 200 to 300 microns;

2003-09-08

Huvudfaxen Kassar

10

- a final grinding of the blade to the desired front bevel, from about -15 degrees (75 degree blades) to about +15 degrees (105 degree blades) in accordance with the intended application;
- 5 - a chamfer bevel at the blade tip, on the surface facing the dryer, with a length in the range from 0 mm (no chamfer) to 0.5 mm, and with a bevel lower than the sliding bevel in the range from 3 to 15 degrees, preferably from 6 to 12 degrees.

10

Although the technical effect of the present invention is obtained with a ceramic top coating of chromia (0% or close to 0% titania), it is preferred to have a top coating of chromia-titania, where the titania
15 content is in the range from 5% to 25%, preferably from 10% to 15%.

By way of introduction, the performance of the creping blade according to the invention will be briefly outlined with reference to figures 1-4, where a prior art
20 blade is compared to the inventive blade.

Figure 1 illustrates the use of a prior art creping blade and shows the situation for a newly installed steel blade. The creping blade 2 is shown in engagement with the surface of a dryer cylinder 1. The dryer moves
25 according to the arrow a, transporting paper web 3 and a coating chemical layer 4 up to the working edge 5 of the blade 2. The paper web 3 hits the surface 11 of the blade at a point 6 near the edge 5 thereof, and the web 3 is thereby compressed and changes direction in the form of a
30 creped tissue 7. As illustrated in the figure, the coating chemical layer 4 is partially scraped off by the working edge 5 of the creping blade, but some material of this chemical layer 8 remains on the surface of the dryer 1. If the degree of adhesion between the web and the
35 cylinder surface is very high, then point 6 corresponding to the web impact area upon the creping blade can be very close to the working edge 5 or even superimposed.

2003 -09- 0 8

Huvudfaxen Kassen

11

Figure 2 again illustrates the use of the prior art creping blade, but now after a working time of t_1 . Hence, figure 2 shows the situation for a worn prior art creping blade 2 due to sliding against the dryer surface. The working edge 5 as shown in figure 1 is now replaced by a sliding surface 5'. The impact wear located in the area 6 has created a groove on the surface 11 of the blade. Due to the usual constant linear load applied to the blade tip, the development of the sliding surface 5' will directly decrease the scraping efficiency of the blade 2, whereby the amount of residual chemical layer 8 will increase over time.

Figure 3 illustrates the use of a creping blade 2 according to the present invention and shows the situation for a newly installed blade. The blade is in contact with the dryer surface at the edge 5. The chromia or chromia-titania layer is represented by the darker area 9 in the figure. In this example, the prebevel given to the steel substrate causes the ceramic coating to have a wedge shape as indicated by the darker area 9 in the figure.

Figure 4 again illustrates the use of a creping blade 2 according to the present invention, but now after a working time of t_1 (similar working time as shown in figure 2 for the prior art steel blade). Hence, figure 4 shows the situation for a worn creping blade according to the present invention. The sliding wear rate is much lower compared to the situation for the prior art blade shown in figure 2, and the sliding bevel 5' is so small that it is practically similar to an edge. As a consequence, for a given linear load applied to the blade tip, the scraping efficiency of the inventive blade is only slightly lower compared to a newly installed blade, and the residual amount 8 of the coating chemical layer 4 has only increased by a small amount.

Examples

In order to determine the performance of the creping blades according to the present invention, a number of comparative trials were performed.

5

Example 1

In a tissue mill, trials were performed with three different types of creping blades. The first type, labeled A, was a blade according to the present invention, having a ceramic top coating of chromia-titania with 15% titania content. The second type, labeled B, was a prior art ceramic tipped blade with an alumina-based material for the ceramic coating. The third type, labeled C, was a prior art metal carbide blade.

The running conditions for the creping process were the following:

- paper web made from 100% recycled fibers;
- industrial towel type tissue;
- grammages of 19, 22 and 28 g/m², with wet strength;
- Yankee speed of 1050 m/min;
- Crepe ratio of 15%;
- Yankee surface comprised of Metso Curemate-78, a HVOF WC-Co-Cr coating;
- web moisture of 3.5-4%;
- creping blade dimensions of 1.2 x 100 x 2980 mm (thickness x width x length);
- a blade bevel of 85 degrees (-5 degrees from square edge);
- a blade load of 2.5 bars (280 kgf/m on the reading scale);
- a base adhesive composition comprised of Cyltac (Key Chemicals) 133 @ 37 ml/min or 2.3 mg/m²;
- a release composition comprised of Cylube (Key Chemicals) 112 @ 16 ml/min or 4.6 mg/m²;
- a modifier composition comprised of Cyltac 420 (Key Chemicals) (DiAmmoniumPhosphate) @ 17 ml/min or 1.8 mg/m².

Ink. t. Patent- och reg.verket

13

2003 -09- 08

Huvudfaxen Käsön

Blade A (the blade according to the present invention) was run for 19 hrs and was not at the end of its lifetime. Blade B was run for 11 hrs and was removed due to 2 chips occurring. Blade C was run for 20 hrs and was at the end of its lifetime.

Figure 5 represents an EDX (Energy Dispersive X-ray) spectrum made on the sliding bevel of blade A after 19 hrs running time. No peaks are found related to the material of the Curemate-78 surface (W-Co-Cr). The peaks from Cr, Ti and O are related to the ceramic composition of the creping blade coating, and the peak from Au is due to gold sputtering of the sample.

Figure 6 represents an EDX spectrum made on the sliding bevel of blade B after 11 hrs running time. Again, no peaks are found related to the material of the Curemate-78 surface. The peaks from Al, Zr and O are related to the ceramic composition of the creping blade coating, and the peak from Au is due to gold sputtering of the sample.

Figure 7 represents an EDX spectrum made on the sliding bevel of blade C after 20 hrs running time. The blade material is WC-Co without any Cr content. A small but clearly visible Cr peak in this spectrum is related to the material of the Curemate-78 surface of the Yankee (W-Co-Cr). Although not quantitative, this is a sign of friction/microwelding interaction between the material of the blade and that of the Yankee dryer surface.

Moreover, figure 8 is a SEM view of a macrochip that occurred on blade B. The failure of the ceramic created a line defect on the tissue web, which is unacceptable and therefore lead to a blade change.

As a conclusion of this example, the state of the art ceramic tipped blade (blade B) is sensitive to macrochips. The state of the art metal carbide tipped blade (blade C) is not particularly sensitive to macrochips but show signs of unwanted interaction with

the dryer Curemate-78 surface. The blade according to the present invention (blade A) combines the benefits of the two state of the art blades.

5 **Example 2**

On another tissue machine, currently employing alumina-based creping blades, a trial of ten blades according to the invention was performed.

10 The running conditions for the creping process were the following:

- paper web made from 100% deinked fibers (recycled);
- toilet paper tissue type;
- grammage of 16 g/m²;
- Yankee speed of 770 m/min;
- 15 - Yankee surface comprised of cast iron;
- Reel speed of 560 m/min (crepe ratio 27%);
- web moisture of 3%;
- creping blade dimensions of 1.2 x 120 x 3420 mm (thickness x width x length);
- 20 - a blade bevel of 85 degrees (-5 degrees from square edge);
- a blade load of 2.5 kN/m;
- a stick-out of 60 mm.

25 The ceramic blades currently used on this machine exhibits a very large variation in blade lifetime, ranging from 1 hour up to over 100 hours. The lifetime of the currently used alumina-based ceramic tipped blades is limited mainly by chipping problems, and the average
30 lifetime is about 50 hours.

The lifetime of the ten blades according to the present invention tested on this machine were (in hours) 77-116-60-142-76-50-65-109-44-124, with an average of 86 hours and a minimum lifetime of 44 hours. Change of blade
35 was in this case dictated by a change in paper grade, and not by chipping problems.

An alumina-based ceramic tipped blade was run on the machine for 131 hours and then inspected in a scanning electron microscope (SEM). Figure 9 represents an SEM view of the edge of that blade. The sliding wear path, indicated by the arrow in the figure, was found to have a width of 550 μm .

Figure 10 represents a similar SEM view, but of the creping blade according to the present invention after a running time of 142 hours on this machine. The sliding wear path, indicated by the arrow in the figure, was found to have a width of 150 μm . This should be compared to the result evidenced by figure 9 for the state of the art blade for a similar running time on the same machine.

As a conclusion of this example, the resistance to chips on cast iron for a tissue grammage this low is greatly improved by the use of blades according to the invention. It should be pointed out that blade chips in connection with such very light tissue may be responsible for web breaks, and consequently loss in productivity.

In addition, the lower sliding wear path obtained for the inventive blade compared to the state of the art blades (150 μm compared to 550 μm) will ensure a more uniform scraping efficiency of the coating chemicals over time, and therefore also a more constant creping process.

Example 3

On yet another tissue machine, currently employing alumina-based ceramic tipped creping blades, a comparative trial was performed between state of the art blades and blades according to the present invention.

The running conditions for the creping process were the following:

- paper web made from 100% virgin fibers;
- soft toilet paper tissue type
- grammage of 21 g/m²;
- Yankee speed of 1100 m/min;
- Yankee surface comprised of cast iron;

2003 -09- 0 8

16

Huvudfaxen Kässan

- creping blade dimensions of 1.2 x 120 x 2790 mm (thickness x width x length);
- blade bevel of 75 degrees (-15 degrees from square edge).

5

State of the art ceramic tipped and metal carbide tipped blades were compared to a blade according to the present invention. The blade according to the invention had a 90% chromia - 10% titania composition. In this case, the softness attributed value is an important criteria for this tissue mill. The three blade types were run for about 8 hours during 3 consecutive days of production of the same grade. The desired softness value is 3.0, with a minimum acceptable value of 2.6. Figure 11 shows a graph representing the results obtained by the three types of blades.

Clearly, this trial shows that for high quality tissue grade, the state of the art ceramic blade is not able to reach the same results as the metal carbide blade, i.e. to keep the softness as constant and high as possible. The blade according to the invention, however, (in this case with a ceramic having 90% chromia and 10% titania) gives a softness comparable to that of the metal carbide tipped blade, but lacks the potential drawbacks with respect to friction compatibility.

Example 4

In the tissue machine of Example 2 above, tests were performed (under the same running conditions as outlined in Example 2 above) in order to inspect the wear pattern of the worn blades. A comparison was made between alumina-zirconia ceramic tipped blades of the prior art and chromia-titania ceramic tipped blades according to the present invention. Inspection of the worn blades was made by scanning electron microscopy (SEM).

Figure 12 shows a SEM view of the wear pattern created by running web on a state of the art alumina-

zirconia ceramic tipped blade after a running time of 28 hrs.

Figure 13 shows a view similar to that shown in figure 12, but now after a running time of 131 hrs.

5 Figure 14 shows again a view similar to figures 12 and 13, but now for a blade according to the present invention. The blade shown in figure 14 has a ceramic coating of chromia with 15% by weight titania. The wear pattern shown in figure 14 was created after a running
10 time of 116 hrs.

Figures 12 to 14, which all have the same magnification, clearly show that the wear of a multiphase material such as alumina with 40% by weight zirconia leads to a quite rough wear pattern, while the use of a
15 single phase material according to the invention (chromia with 15% by weight titania) gives a very smooth impact wear pattern on the blade. This difference in impact wear pattern can explain why the use of a ceramic tipped blade according to the present invention leads to a decrease in
20 the frequency of web breaks compared to a prior art multiphase ceramic material.

Conclusion

A blade for creping has been described. The blade
25 according to the invention has a ceramic top layer covering the working edge of the blade, as well as the surface upon which the web impacts during creping. The ceramic top layer is a ceramic composition having a content of chromia. Preferably, the ceramic composition
30 of the top layer comprises chromia-titania, with a titania content of up to 25% by weight, and preferably between 10% and 15% titania.

The blade according to the present invention leads to lower sliding wear at the working edge of the blade,
35 which in turn gives a more uniform scraping efficiency. Moreover, the ceramic top layer of the blade according to the present invention is comprised of a single phase

2003 -09- 0 8

Huvudfaxen Kassen

18

composition, leading to a comparatively uniform impact wear at the areas where the web impacts the creping blade. This, in turn, has the advantage that the creping process is more constant over time and that the
5 occurrence of web breaks is drastically reduced.

2003 -09- 08

Huvudfaxen Kassar

19

CLAIMS

1. A blade for creping a paper web from a surface,
comprising a steel substrate which is covered by a
5 ceramic top layer that forms a working edge adapted for
contact with said surface and a web impact area upon
which the web impacts during creping, wherein the ceramic
composition of said ceramic top layer has a content of
chromia (Cr_2O_3).
- 10 2. A blade according to claim 1, wherein the ceramic
top layer is a single phase ceramic material.
3. A blade according to claim 1 or 2, wherein the
15 ceramic composition contains at least 75% by weight
chromia.
4. A blade according to any one of claims 1-3, wherein
the ceramic top layer comprises chromia-titania
20 ($\text{Cr}_2\text{O}_3/\text{TiO}_2$) with a titania (TiO_2) content up to 25% by
weight.
5. A blade according to claim 4, wherein the ceramic
top layer has a titania content in the range from 5% to
25 15% by weight, preferably in the range from 10% to 15%.
6. A blade according to any one of the preceding
claims, wherein the thickness of the ceramic top layer at
the edge section of the blade is in the range from 150 to
30 300 microns, preferably from 200 to 300 microns.
7. A blade according to any one of the preceding
claims, further comprising a bond coat between the steel
substrate and the ceramic top layer.
- 35 8. A blade according to claim 7, wherein said bond coat
comprises Ni-Cr.

9. A blade according to claim 7 or 8, wherein said bond coat has a thickness between 10 and 50 μm .

5 10. A blade according to any one of the preceding claims, wherein the steel substrate has a prebevel with an angle of up to 10 degrees, upon which the ceramic top layer is deposited.

10 11. A blade according to claim 10, wherein said prebevel has an angle of 4-8 degrees.

12. A blade according to any one of the preceding claims, wherein said top layer is a thermally sprayed
15 ceramic layer.

13. A blade according to any one of the preceding claims, wherein the steel substrate has a thickness in the range from 0.635 to 1.250 mm.

20

14. A blade according to any one of the preceding claims, wherein the steel substrate has a width in the range from 50 to 150 mm.

25

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

link t. Patent- och reg.verket

2003 -09- 0 8

Huvudfaxen Kassa

21

ABSTRACT

A blade for creping has been described. The blade according to the invention has a ceramic top layer
5 covering the working edge of the blade, as well as the surface upon which the web impacts during creping. The ceramic top layer is a ceramic composition having a content of chromia. Preferably, the ceramic composition of the top layer comprises chromia-titania, with a
10 titania content of up to 25% by weight, and preferably between 10% and 15% titania.

(Elected for publication:

Fig. 3)

P
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157

1/11

Fig. 1
(Prior Art)


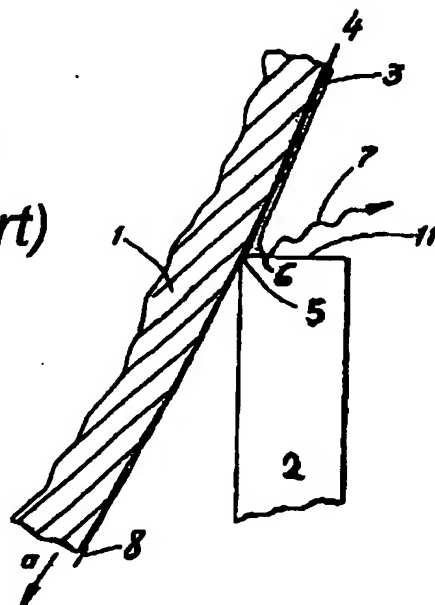


Fig. 2
(Prior Art)

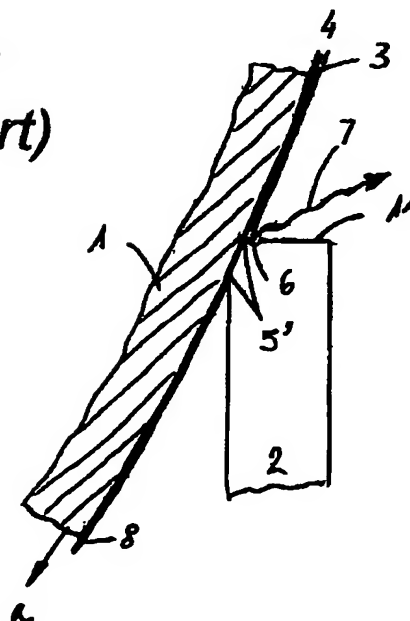

2/11

Fig. 3


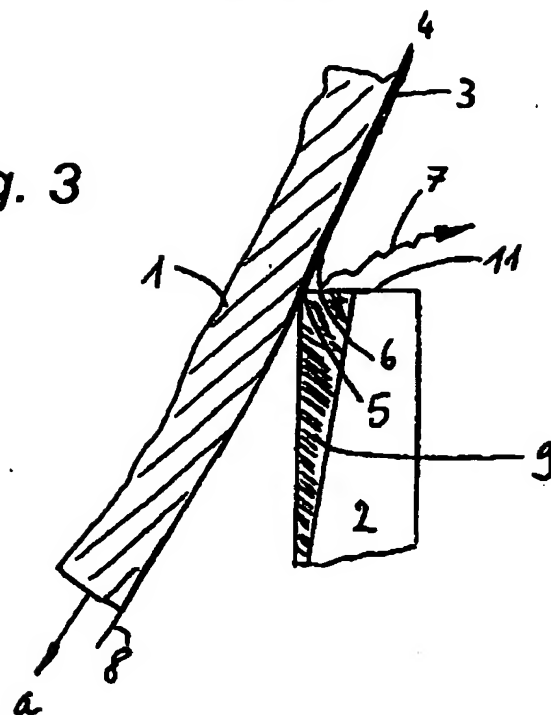


Fig. 4

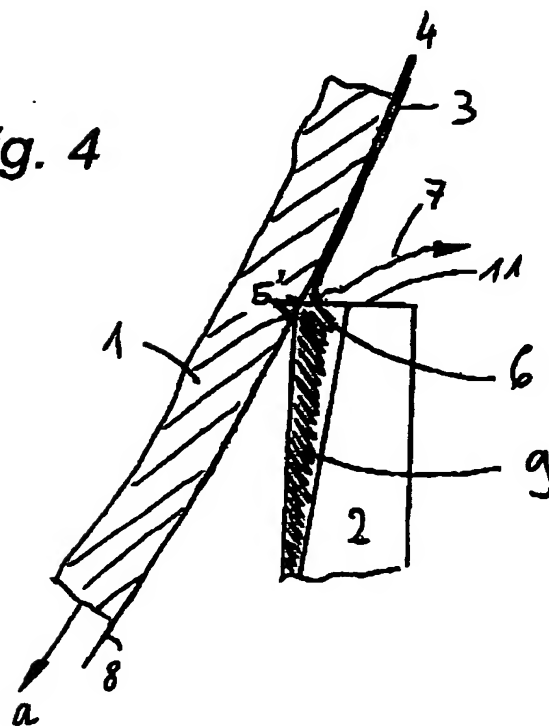

Ink. t. Patent- och reg.verket

2003 -09- 0 8

Huvudfaxen Kassen

3/11

Fig. 5

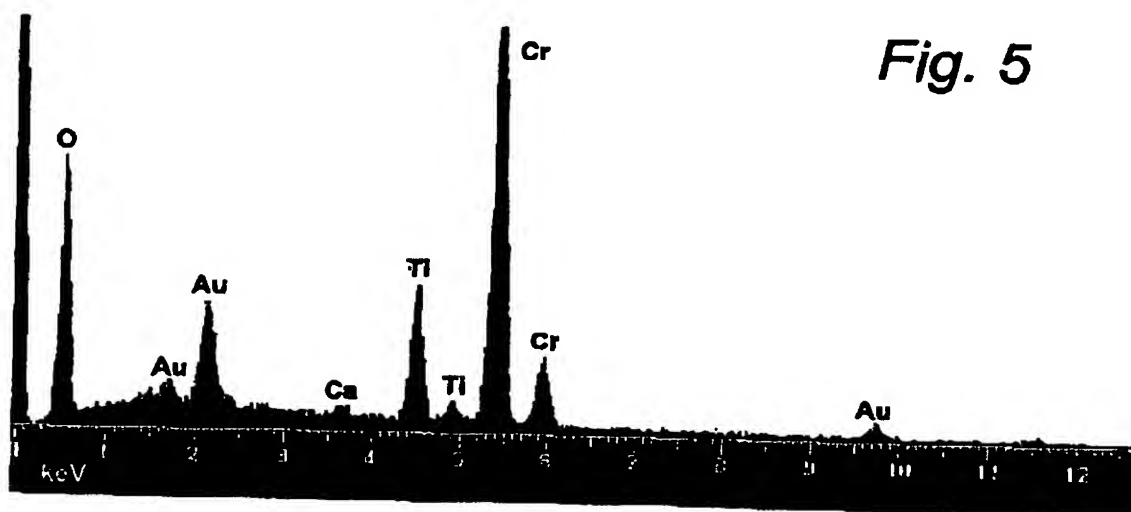


Fig. 6




4/11

Ink. t. Patent- och reg. verkst

71103 -09- 0 8

Huvudfaxen Kassar

Fig. 7

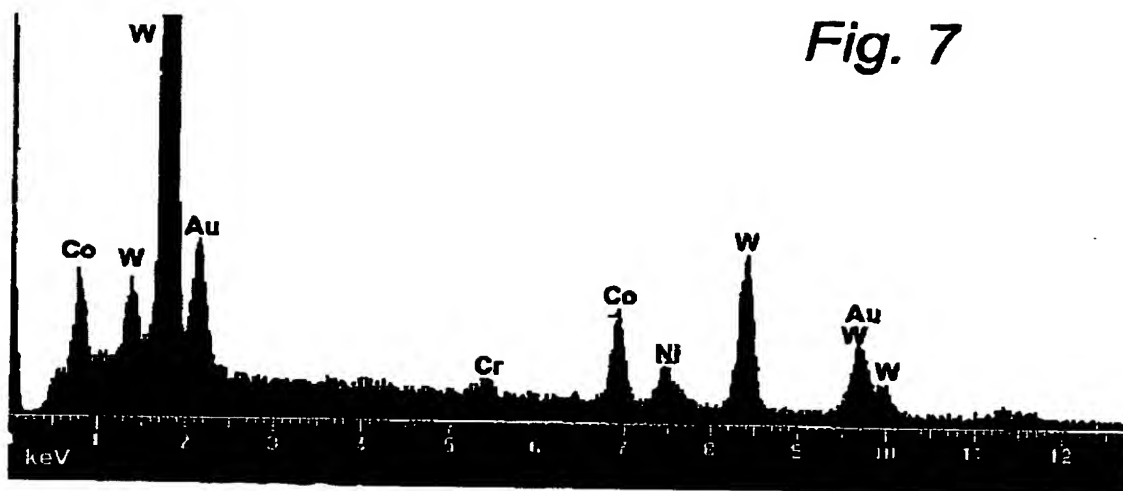


71103-09-08

5/11

Ink. t. Patent- och reg.verket

2003 -09- 0 8

Huvudfaxen Kassen

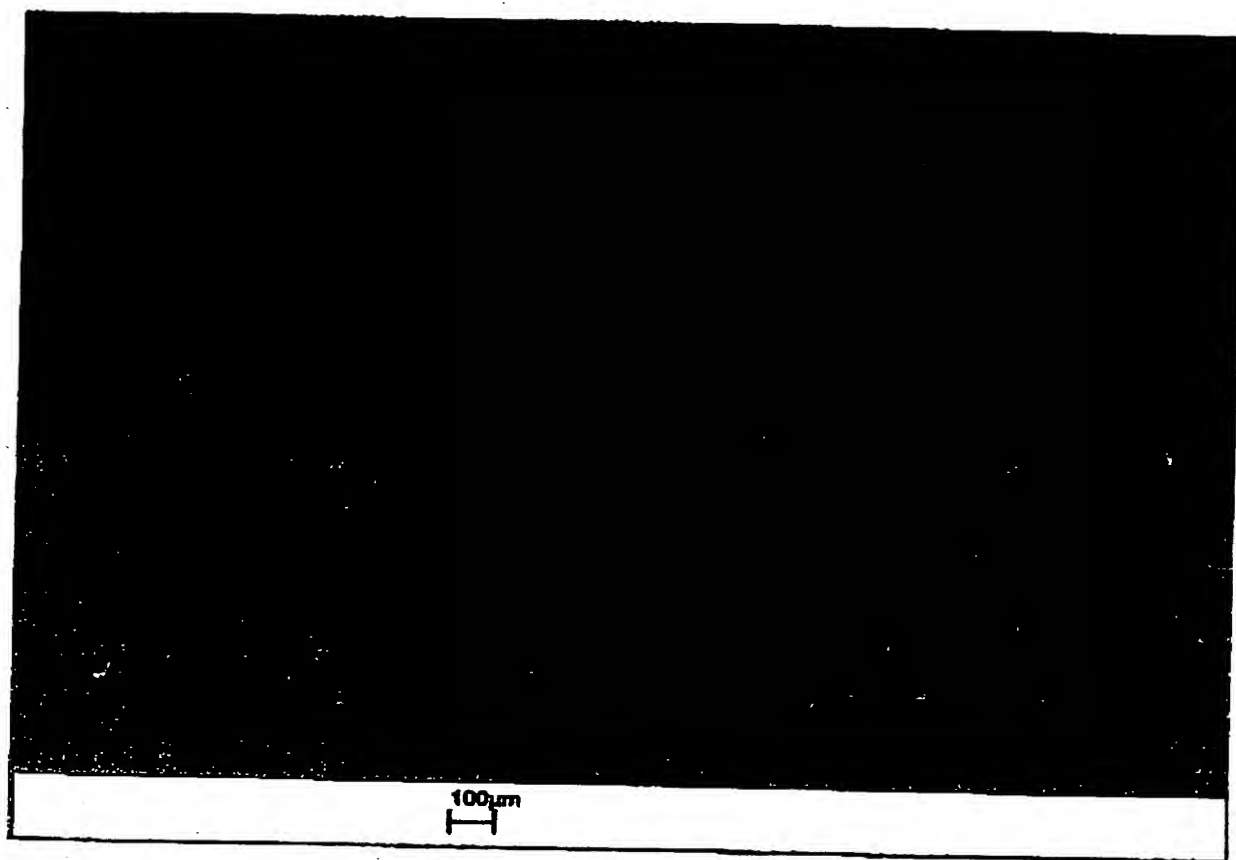

6/11

Ink. t. Patent- och reg.verket

2003 -09- 08

Huvudfaxen Kassa

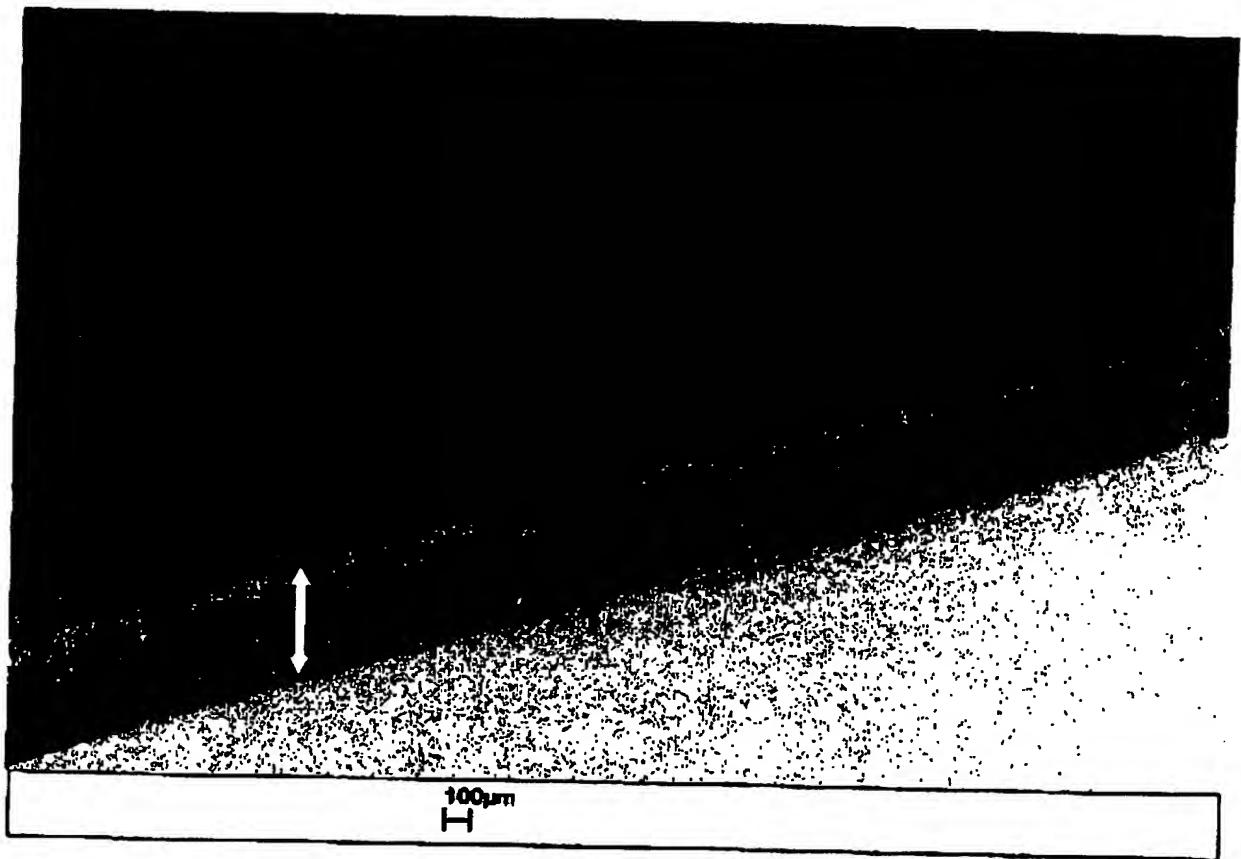


Fig. 9

7/11

Ink. t. Patent- och reg.verket

2003 -09- 0 8

Huvudfaxen Kassar

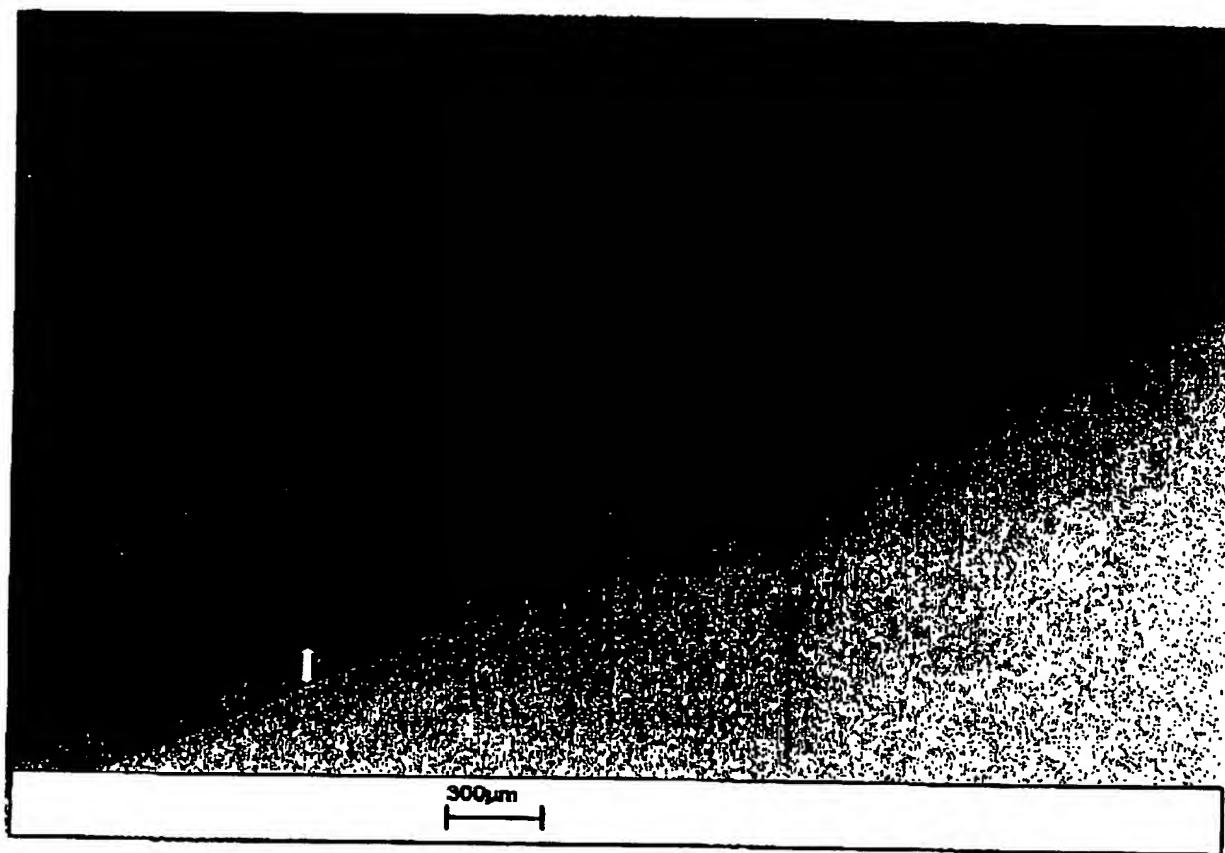


Fig. 10

03031007

8/11

Ink. t. Patent- och reg.verket

2003-09-08

Huvudfaxen Kassa

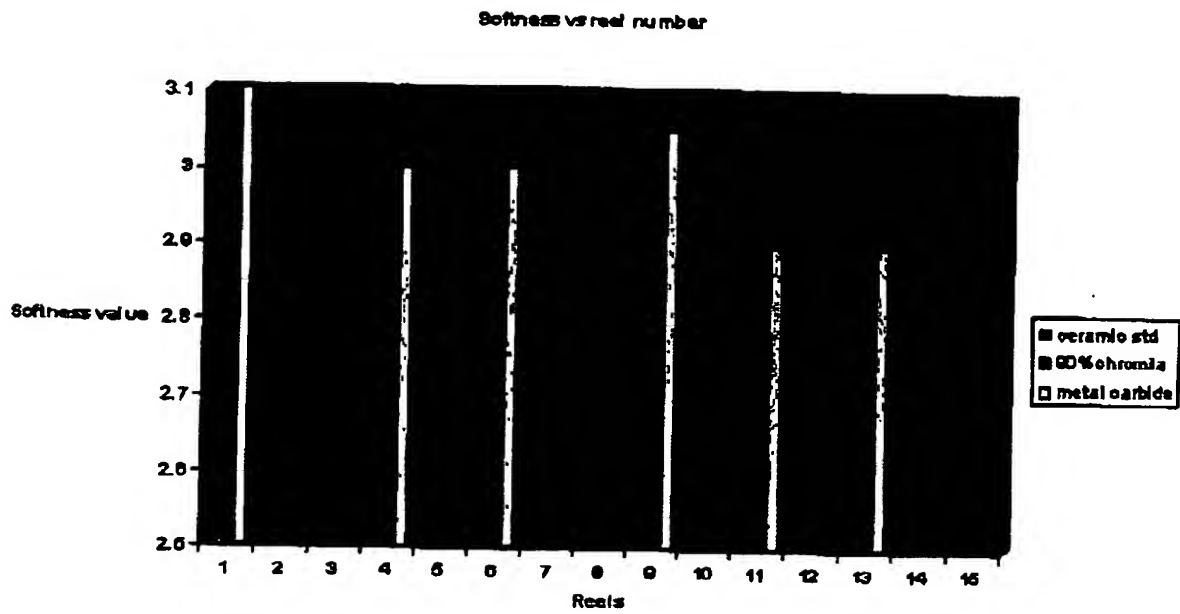


Fig. 11

link: t. Patent- och reg.verket

2003 -09- 0 8

Huvudföreläsningen

9/11



Fig. 12

Ink. t. Patent- och reg.verket

2003-09-08

Huvudfaxen Kasse

10/11

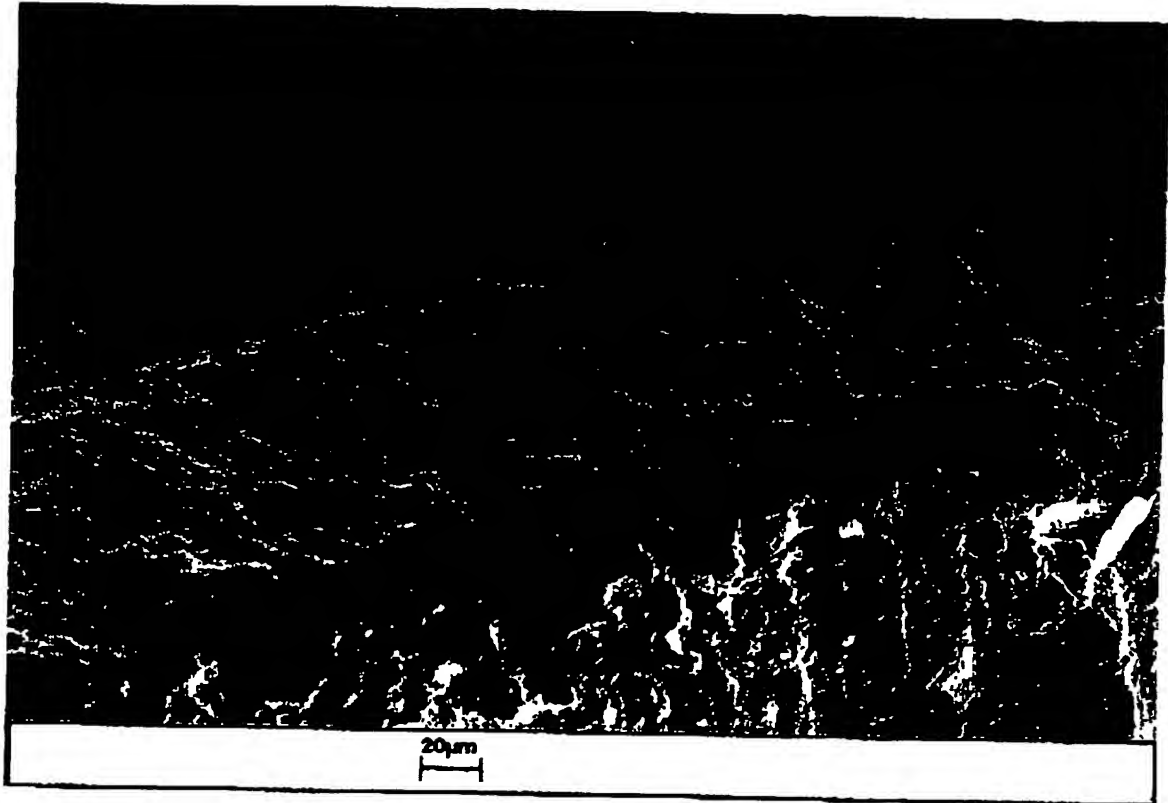



Fig. 13

Ink. t. Patent- och reg.verket

2003 -09- 0 8

Huvudfaxen Kassar

11/11

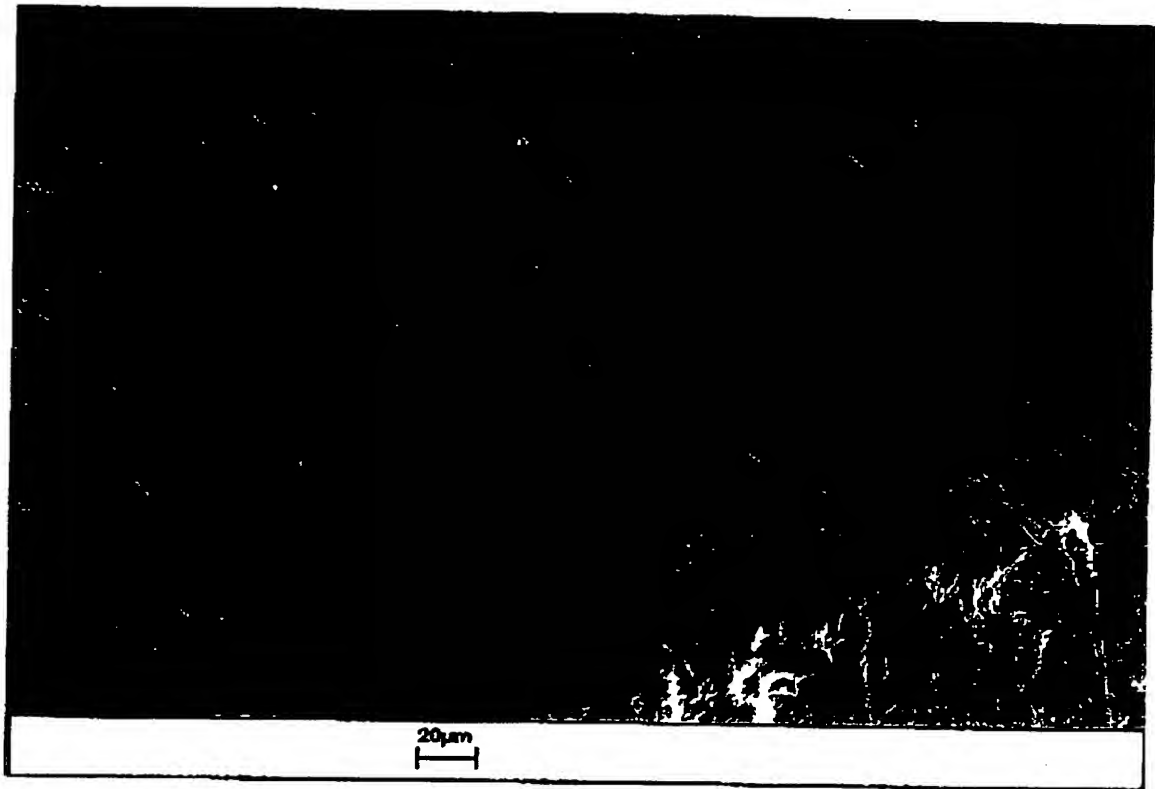

1/11

Fig. 1
(Prior Art)

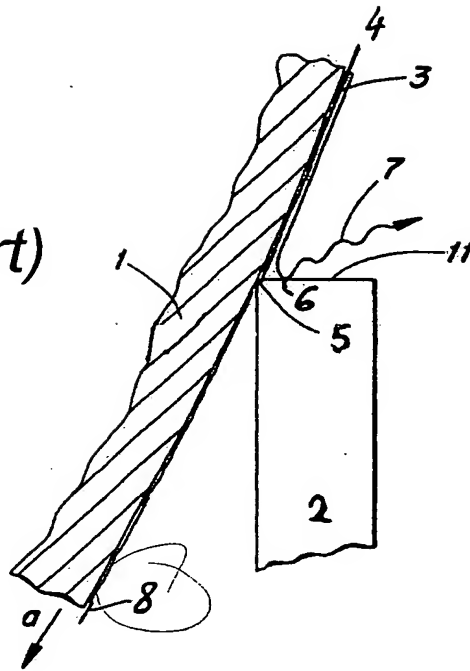
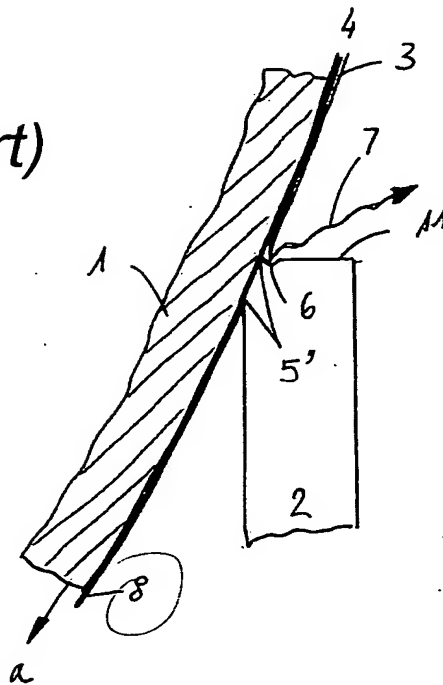


Fig. 2
(Prior Art)






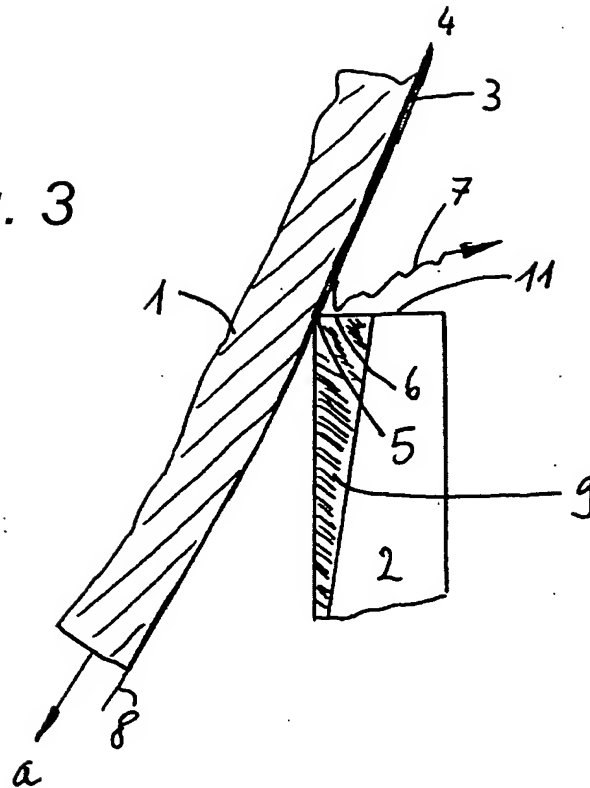


Fig. 4

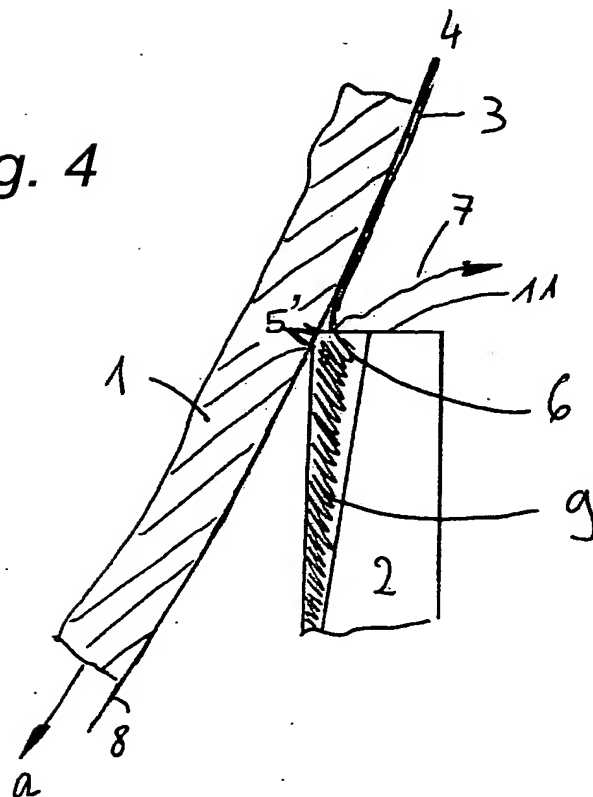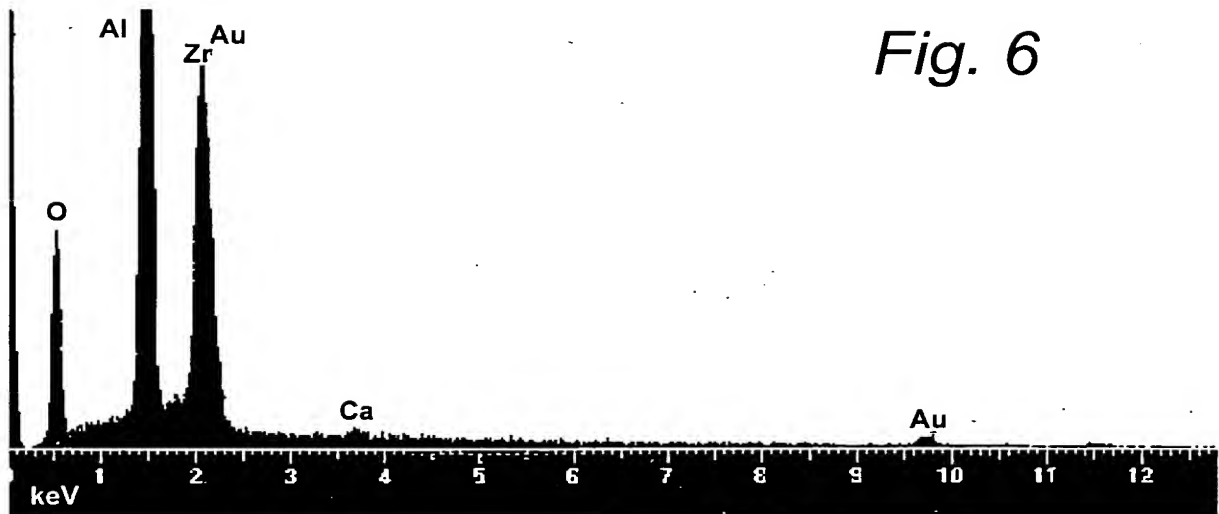


3/11

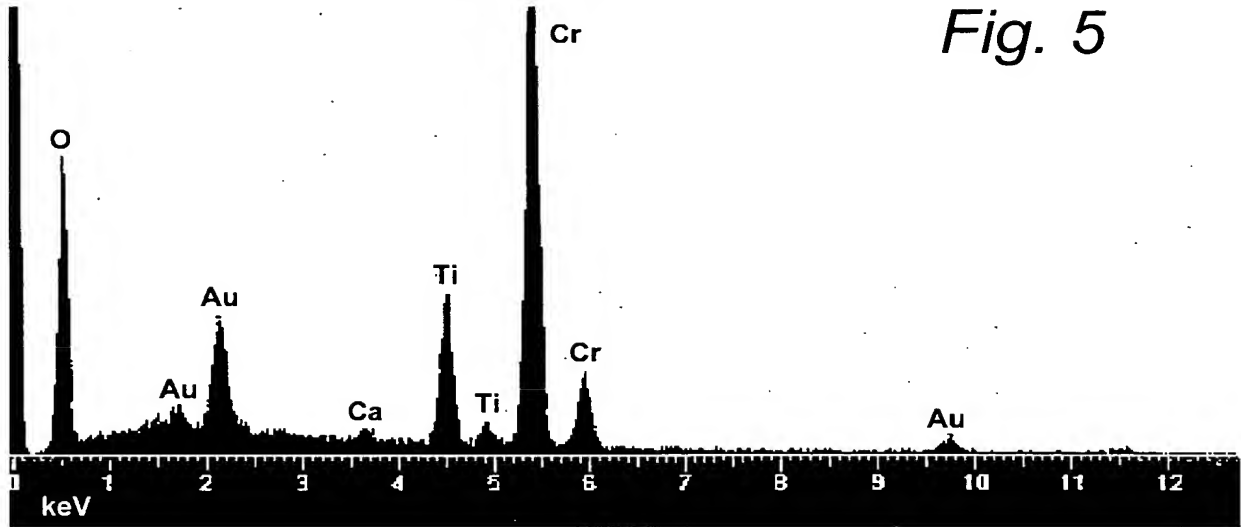

4/1.1

Fig. 7

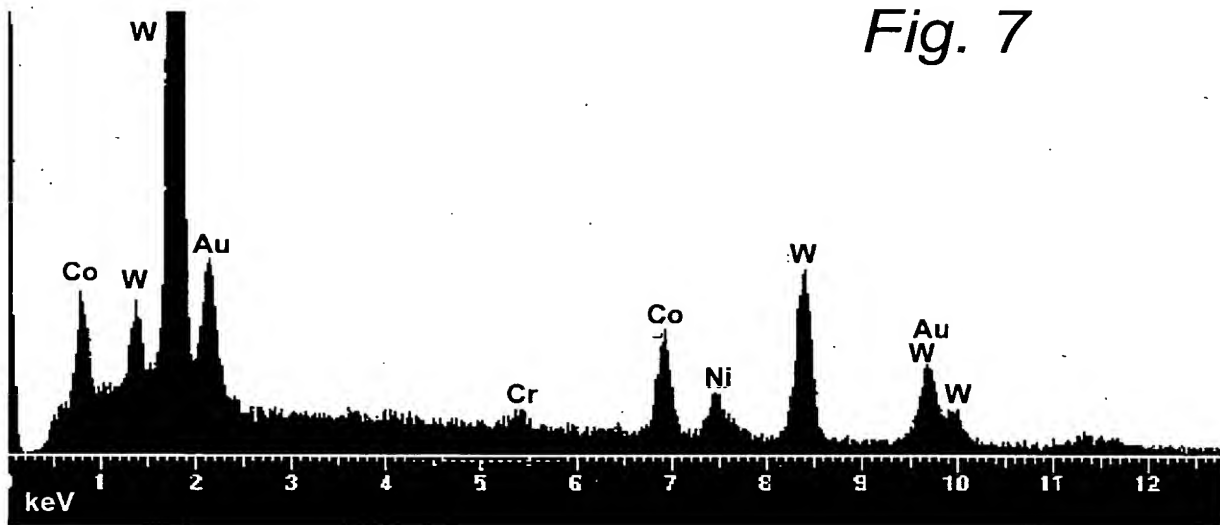

5/11

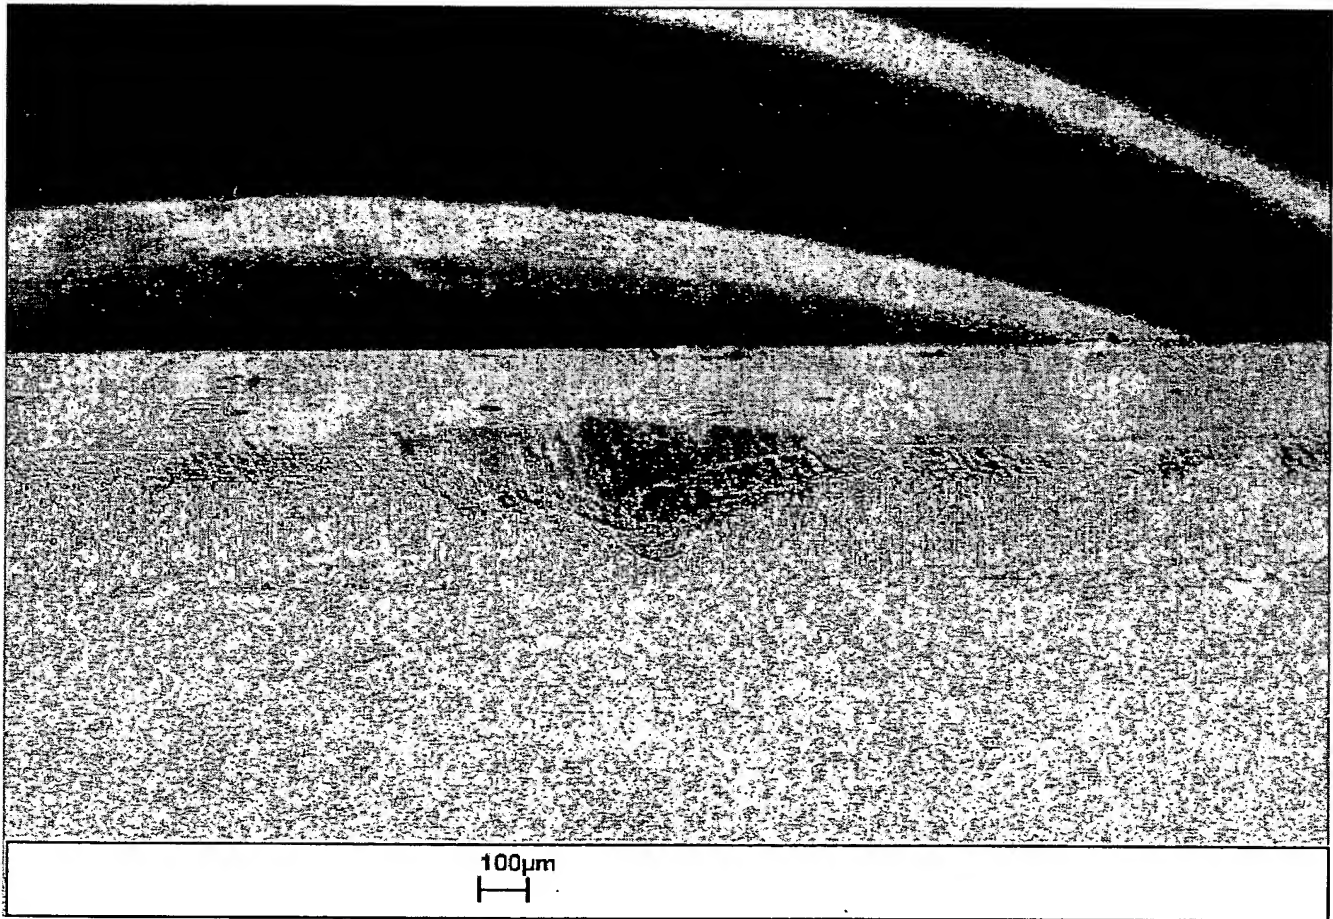


Fig. 8

20250808

6/11

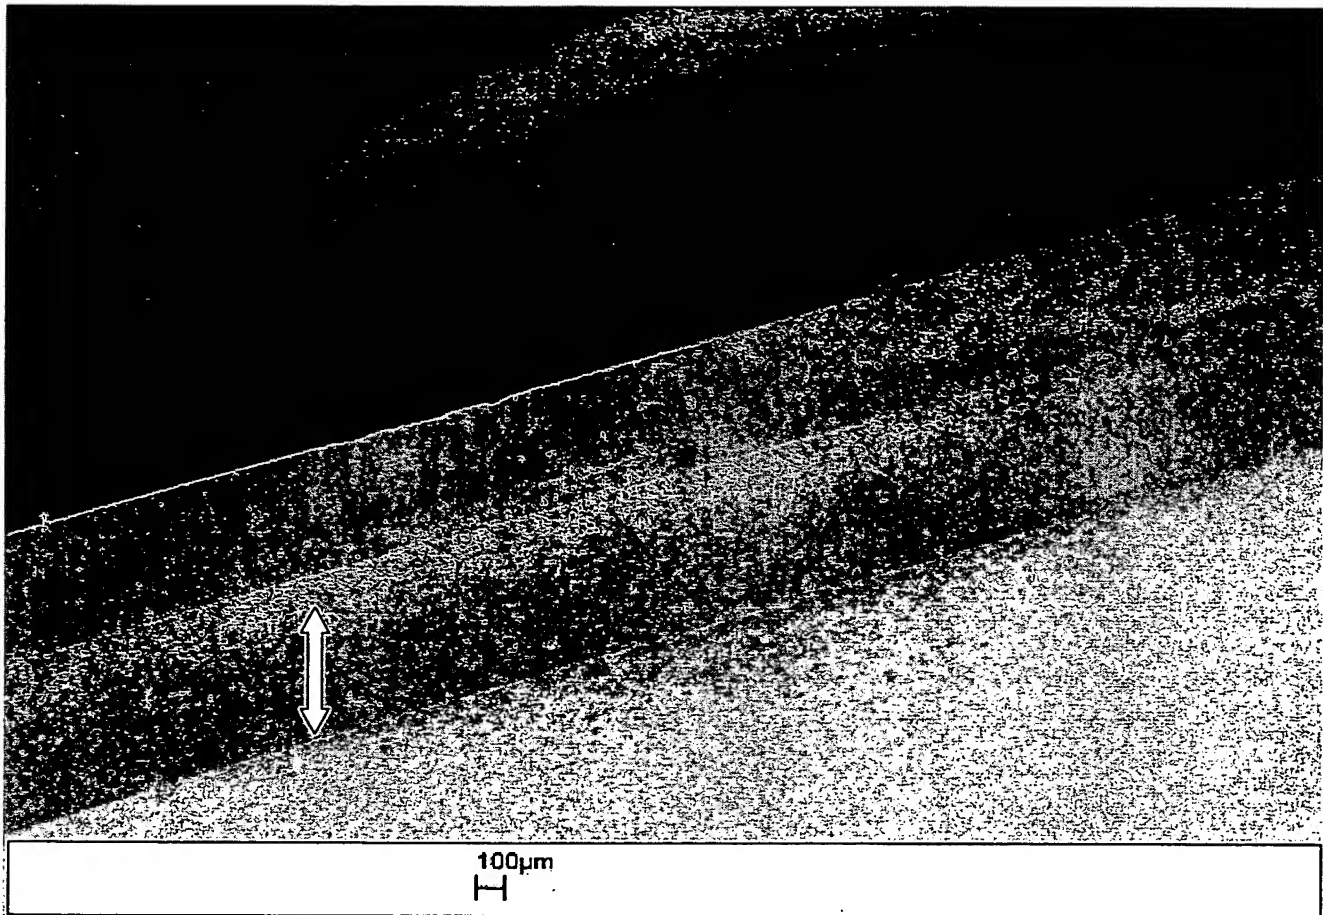


Fig. 9

7/11

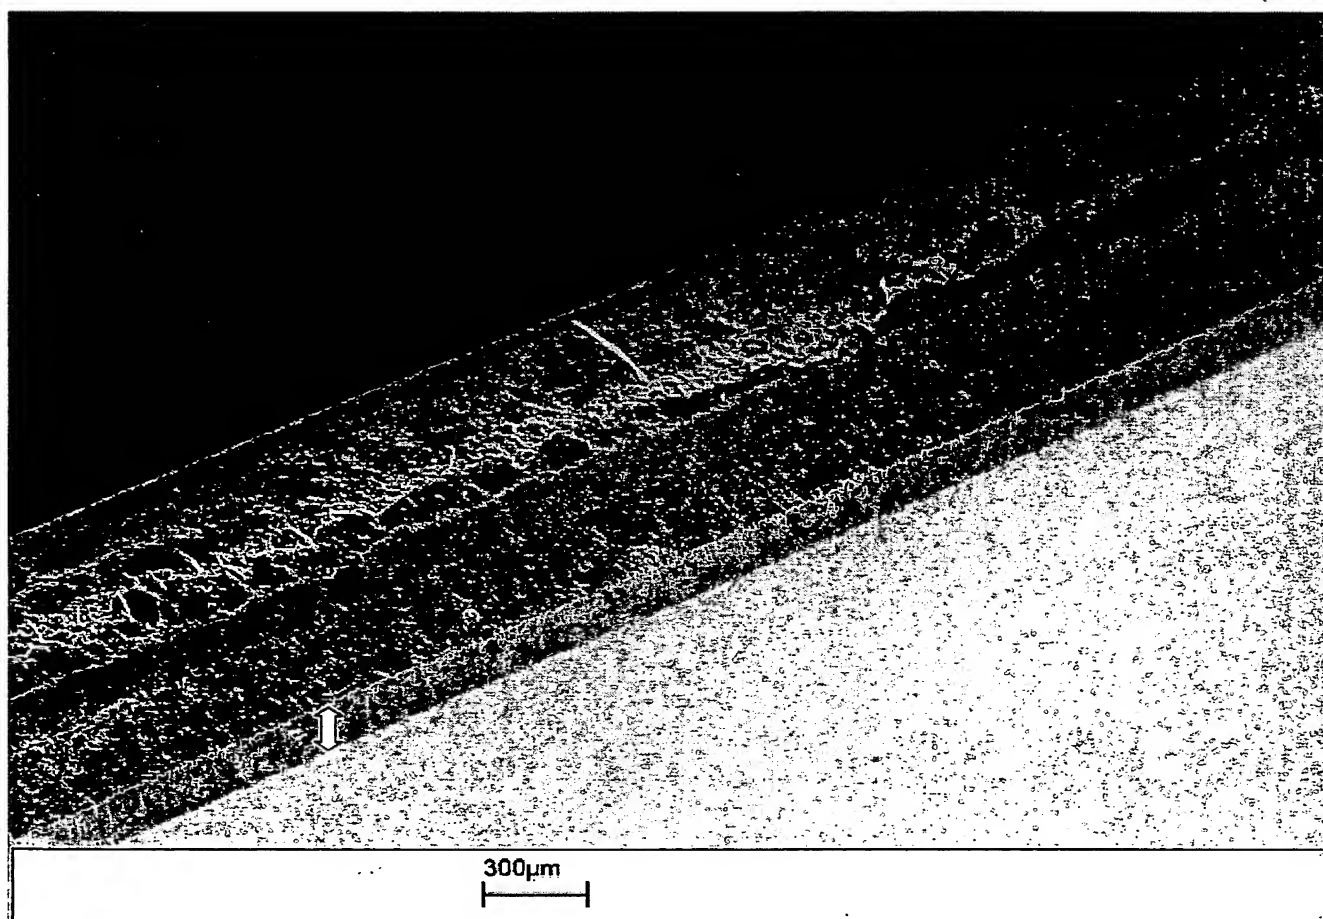


Fig. 10

8/11

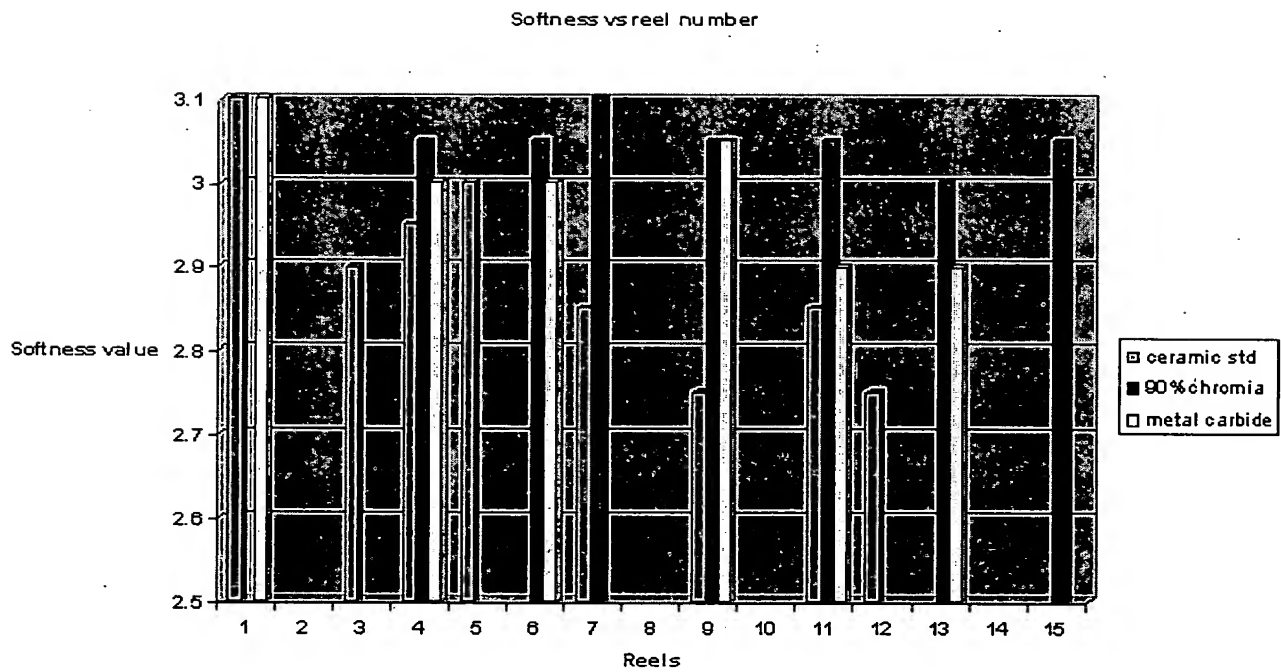


Fig. 11

Fig. 12

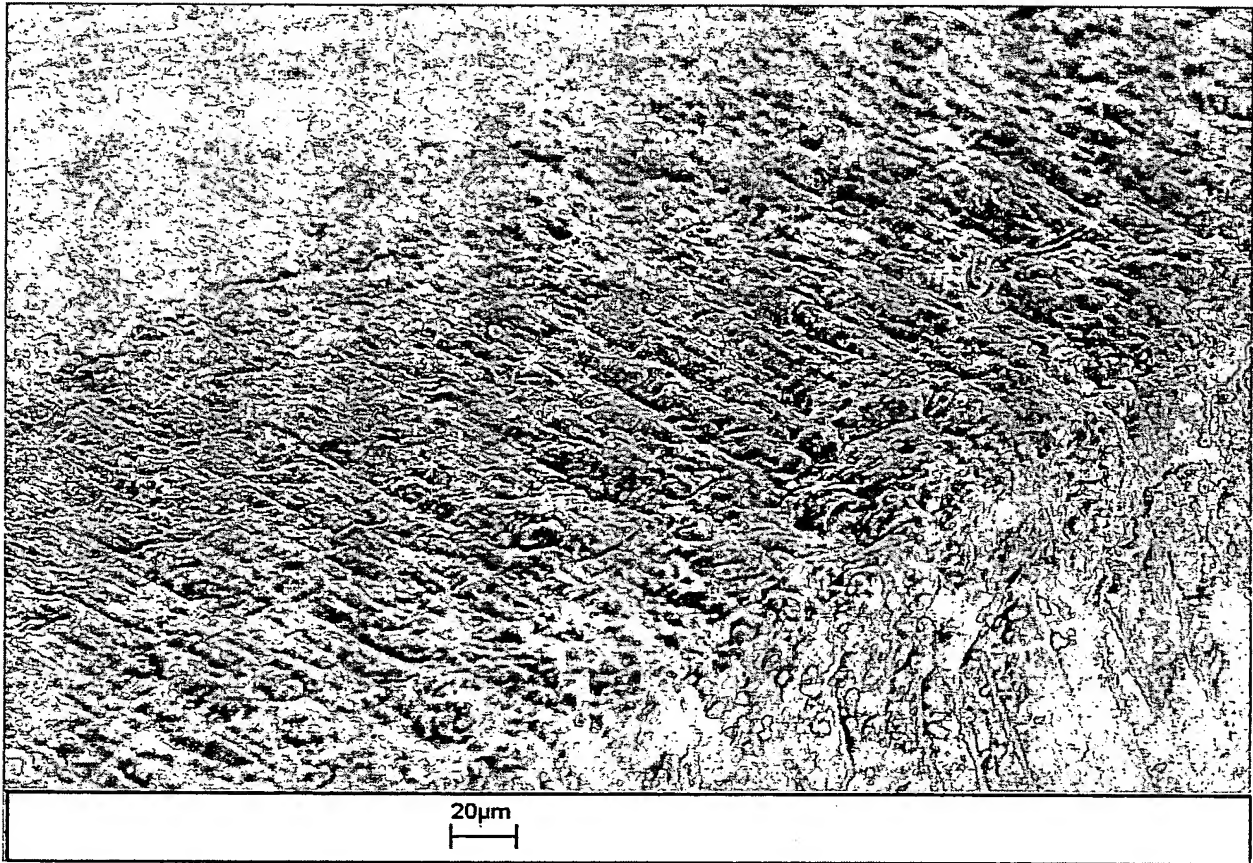


Fig. 13



11/11

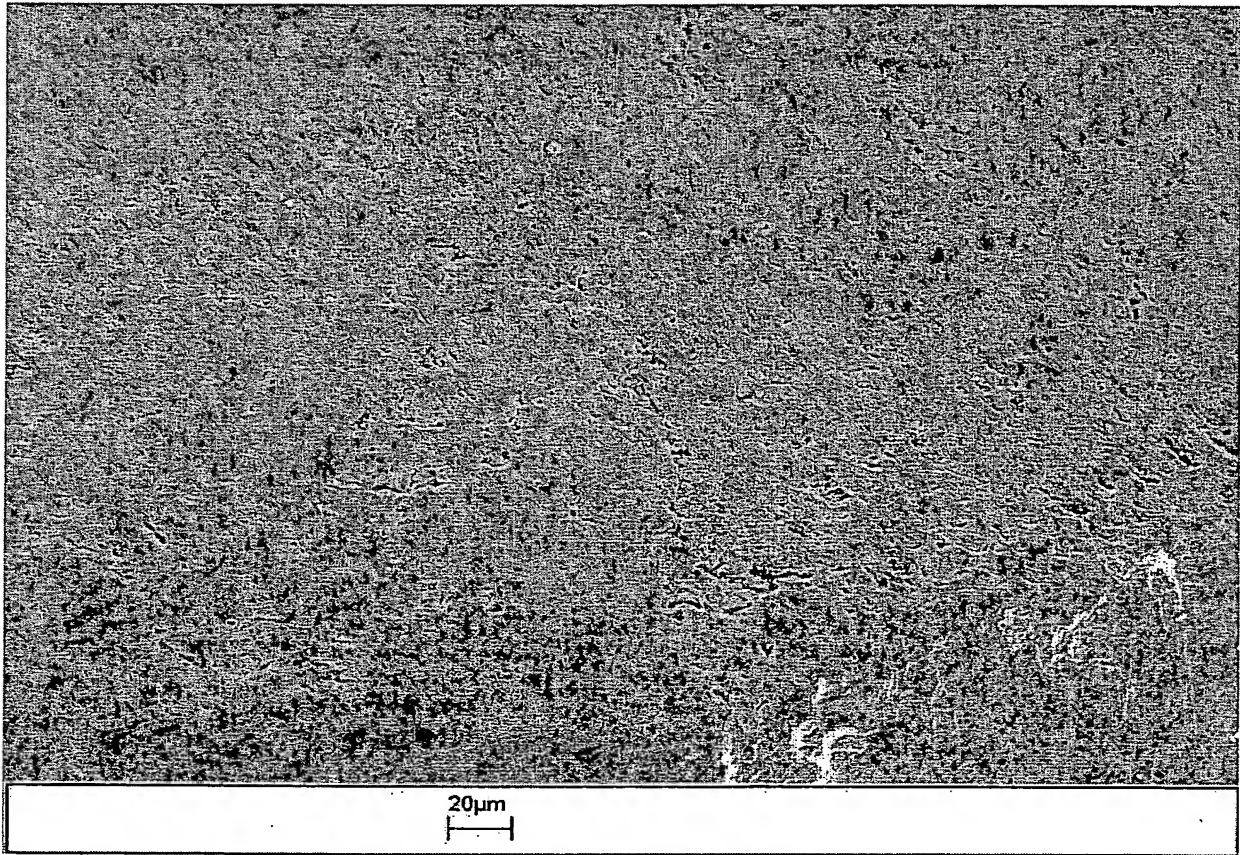


Fig. 14

03-09-09 H

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.